



**2019 INTERNATIONAL  
SAFETY FOOTWEAR CATALOG**









**BUILT ON A TRADITION OF  
CRAFTSMANSHIP AND INNOVATION,  
THE TIMBERLAND PRO® BRAND  
HELPS YOU CONQUER YOUR WORK  
DAY. WE KNOW THAT WHAT YOU  
WEAR IS AS IMPORTANT AS THE  
TOOLS YOU USE. WE ALSO KNOW  
THAT WHAT'S NEEDED TO GET THE  
JOB DONE IS ALWAYS CHANGING,  
SO OUR FOOTWEAR IS ALWAYS  
EVOLVING, ENGINEERED WITH  
TECHNOLOGIES TO PROVIDE  
THE VERY BEST IN COMFORT,  
DURABILITY AND PERFORMANCE—  
ALL DAY LONG.**



# TABLE OF CONTENTS

|                             |    |                                     |           |
|-----------------------------|----|-------------------------------------|-----------|
| TIMELINE OF INNOVATION..... | 6  | POWERTRAIN SPORT .....              | 31        |
| HELIX HD .....              | 9  | POWERTRAIN.....                     | 32        |
| BOONDOCK.....               | 11 | WILDCARD.....                       | 33        |
| HYPERCHARGE.....            | 13 | GLADSTONE.....                      | 34        |
| BOSSHOG .....               | 15 | BRANSTON .....                      | 35        |
| CAPROCK.....                | 16 | VALOR TACTICAL.....                 | 36        |
| RIGMASTER .....             | 17 | VALOR DUTY.....                     | 37        |
| RESISTOR .....              | 18 | WOMEN'S HIGHTOWER .....             | 39        |
| MORTAR PULL-ON.....         | 19 | WOMEN'S RIGMASTER.....              | 40        |
| MAGNUS.....                 | 20 | WOMEN'S POWERTRAIN SPORT .....      | 41        |
| EAGLE .....                 | 21 | WOMEN'S POWERTRAIN.....             | 42        |
| SAWHORSE.....               | 23 |                                     |           |
| HELIX HD MET GUARD .....    | 25 | <b>SIZING CHART .....</b>           | <b>43</b> |
| MILLWORKS MET GUARD.....    | 26 | <b>INSOLES .....</b>                | <b>44</b> |
| EXTERNAL MET GUARD.....     | 27 | <b>TECHNOLOGY KEY .....</b>         | <b>46</b> |
| MUDSLINGER .....            | 28 | <b>FACTORY DIRECT CALENDAR.....</b> | <b>48</b> |
| RATCHET.....                | 29 | <b>INDEX .....</b>                  | <b>49</b> |





# ASTM PROTECTION

Timberland PRO is committed to passing and exceeding ASTM F2413 safety standard specifications for performance requirements. Through our relentless testing, and dedication to superior design and construction, we deliver the ultimate comfort, durability and protection expected from a Timberland PRO® product.

# CE EN ISO PROTECTION

Timberland PRO offers a wide range of products that meet the minimum safety standards set by the International Organization for Standardization (ISO). The current standard for Safety Footwear across Europe (EN) is EN ISO 20345:2011. Matching this standard, we're committed to designing footwear that helps to minimize injuries and maintain a safer, more productive workplace.



# CSA PROTECTION

Timberland PRO builds footwear that meets CAN/CSA-Z195 Canadian Safety Association (CSA) standards for toe protection, puncture resistance and resistance to electric shock.







## TIMELINE OF INNOVATION

### THE EVOLUTION OF TIMBERLAND PRO



1999 The Timberland PRO® brand is born



1999 Footwear features traditional work styling and constructions that are recognizably Timberland: traditional Goodyear welt construction in boots like the PIL BOSS



2000 The Superlite Series is launched, featuring the Independent Suspension Network™ system



2004 The PowerFit™ comfort system is introduced in conjunction with the TITAN® series



2005 Timberland PRO launches in Canada, providing an array of products that meet CSA Grade 1 requirements, including puncture resistance



2006 Timberland PRO augments its TITAN® product family with the Women's TITAN® 6" work boot and the introduction of Cast-Bond™ construction

### 1999

1999 Timberland PRO's comfort platform, PRO 24/7 Comfort Suspension™ system, is introduced



2000

First ESD (Electro Static-Dissipative) product, the Gorge Multi-Purpose Outdoor shoe, is brought to market



2001

Timberland PRO introduces Timberland's signature Direct Attach waterproof construction



2004



Timberland PRO launches in Europe, providing footwear, apparel and accessories

2004

The TITAN® 6" boot establishes itself as one of the lightest and most comfortable boots in the market



2006

The PowerWelt product family, featuring Ever-Guard® leather, is introduced





# TIMBERLAND PRO CUSTOMER SERVICE

PHONE 1-855-253-3261

FAX 1-855-218-9585

WEB [HTTP://VENDOR.TIMBERLAND.COM](http://vendor.timberland.com)

## STYLE CODE KEY

|             |       |               |
|-------------|-------|---------------|
| TBØ         | A110Ø | 21Ø           |
| PRO<br>CODE | SKU   | COLOR<br>CODE |

**NOTE:** SKUs may contain the letter "O" and/or a Zero. Zeros are represented by a "Ø".

### TIMBERLAND PRO® SERIES BRAND ADVANTAGE

- Timberland heritage—waterproof, craftsmanship, quality
- A brand name that is highly sought after
- Product designs driven by consumers' on-the-job needs





# MORE ENERGY PER FOOT.

**ANTI-FATIGUE TECHNOLOGY COMFORT  
SYSTEM ABSORBS SHOCK WHILE  
RETURNING ENERGY BACK TO THE FOOT IN  
KEY ZONES FOR ALL-DAY COMFORT.**

Contoured insole provides maximum support  
at key pressure points and impact zones.

Cone design results in less material  
meaning lighter footwear.

Innovative design minimizes impact to  
maximize support and reduce fatigue.



# HELIX HD



COMPOSITE  
SAFETY TOE



WATERPROOF  
MEMBRANE



BLOOD-BORNE  
PATHOGEN



PUNCTURE  
RESISTANT



18KV ELECTRICAL  
HAZARD



RUBBER  
OUTSOLE



ANTIMICROBIAL  
ODOR CONTROL



ANTI-FATIGUE  
TECHNOLOGY

TIMBERLAND PRO® RUBBER OUTSOLE WITH  
LIGHT-WEIGHT CUSHIONING PU MIDSOLE



- Premium full-grain leather with waterproof membrane
- Composite safety toe
- Non-metallic puncture plate
- Cement construction for flexibility
- Padded top collar for comfort
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Fiberglass shank for structural support

- Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Ladder-Lock™ Outsole Radius



**TB0 A1X6T 001**

**6" COMPOSITE SAFETY TOE  
WATERPROOF**

Black Full-Grain Leather  
5-12,13,14,15M/W



**TB0 A1XFM 214**

**6" COMPOSITE SAFETY TOE  
WATERPROOF**

Brown Full-Grain Leather  
5-12,13,14,15M/W



**TB0 A1YZM 214**

**8" COMPOSITE SAFETY TOE  
WATERPROOF**

Brown Full-Grain Leather  
5-12,13,14,15M/W





# TAKE SHELTER ↓ INSIDE.



**DYNAMIC ANTI-FATIGUE TECHNOLOGY**  
absorbs shock and returns energy  
back to key zones of the foot, providing  
stability and stamina for long workdays

## THE TIMBERLAND PRO® BOONDOCK WORK BOOT

is equipped with waterproof leather, a waterproof membrane and Thermolite® insulation to keep you warm and dry, no matter how frigid the weather gets.

- A. ANTI-FATIGUE TECHNOLOGY FOOTBED** for all-day comfort and energy return
- B. WATERPROOF LEATHER AND BREATHABLE MEMBRANE** keep your feet dry and comfortable
- C. GOODYEAR WELT/CEMENT HEEL CONSTRUCTION** provides stability and forefoot flexibility
- D. TIMBERLAND PRO® THERMOPLASTIC URETHANE OUTSOLE** maintains flexibility in freezing temperatures
- E. TIMBERLAND PRO® RUBBER TOE PROTECTOR** for increased abrasion resistance and durability
- F. COMPOSITE SAFETY TOE** shaped on TiTAN® last for non-metallic protection and a roomier fit
- G. PUNCTURE-RESISTANT PLATE** minimizes the likelihood of puncture wounds

# BOONDOCK



COMPOSITE  
SAFETY TOE



WATERPROOF  
MEMBRANE



BLOOD-BORNE  
PATHOGEN



TPU OUTSOLE

A1XCH  
A1V3W



10KV ELECTRICAL  
HAZARD



PUNCTURE  
RESISTANT



EVER-GUARD™  
LEATHER



ANTIMICROBIAL  
ODOR CONTROL



ANTI-FATIGUE  
TECHNOLOGY™



FIRE & ICE  
Vibram®

89646

ALL-WEATHER THERMOPLASTIC URETHANE  
OUTSOLE WITH PU MIDSOLE



- Premium full-grain leather
- Waterproof and non-waterproof styles
- Molded rubber toe protector
- Composite safety toe
- Combination three-quarter Goodyear welt/cement heel construction
- Rigid external heel cup for lateral stability
- Fiberglass shank for structural support
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Non-metallic puncture plate
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control
- Low temperature formulation maximizes traction on cold surfaces (tested using SATRA TM144:2007 frosted rough ice surface) and extends flexibility in cold environments
- Deep lugs for mud and snow traction
- Slip resistant
- Abrasion resistant
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours



**TB0 A1XCH 214**

**6" COMPOSITE SAFETY TOE  
UNLINED**

Briar Brown Full-Grain Leather  
5-11,12,13,14,15W



**TB0 A1V3W 270**

**8" COMPOSITE SAFETY TOE  
UNLINED**

Golden Beige Roughcut Leather  
5-11,12,13,14,15W



**TB0 89646 214**

**8" COMPOSITE SAFETY TOE  
WATERPROOF INSULATED**

Brown Full-Grain Leather  
7-12,13,14,15W



TIMBERLAND PRO® STABLE STRIDE™ TECHNOLOGY

# STEADY ON YOUR FEET.



**STABLE STRIDE™ TECHNOLOGY FROM TIMBERLAND PRO®** is specifically designed to provide enhanced lateral stability on slanted and uneven surfaces, reducing ankle rolling, slippage, and injury. From steep roofs to rugged job sites, Stable Stride™ Technology keeps you up and on your feet.



TIMBERLAND PRO® INDEPENDENT SUSPENSION NETWORK™

# MAKE THE JOB SITE A **LEVEL PLAYING FIELD.**

## INDEPENDENT SUSPENSION NETWORK™

**FROM TIMBERLAND PRO®** To navigate rough terrain and stay balanced, you need trustworthy footwear. As you maneuver over uneven surfaces, Timberland PRO® Independent Suspension Network™ outsole technology is engineered to help mitigate pressure points and level out your stride.



# HYPERCHARGE



COMPOSITE  
SAFETY TOE



WATERPROOF  
MEMBRANE



PUNCTURE  
RESISTANT



18KV ELECTRICAL  
SHOCK



RUBBER  
OUTSOLE



ISN  
INDEPENDENT  
SUSPENSION  
NETWORK



ANTI-FATIGUE  
TECHNOLOGY



CARBON  
SHIELD  
TECHNOLOGY



STABLE STRIDE  
TECHNOLOGY

- Premium full-grain leather with waterproof membrane
- Composite safety toe powered by CarbonShield™ Technology
- Cement construction
- Non-metallic puncture plate
- Stable Stride™ technology stability platform
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control
- Contoured shock diffusion plate

TIMBERLAND PRO® RUBBER OUTSOLE  
WITH DUAL-DENSITY EVA MIDSOLE



- Slip resistant
- Abrasion resistant
- Oil-resistant
- Heat resistant up to 572F using EN/ISO 20344:2004 (300C)
- Non-marking
- Flat outsole for maximum ground contact and traction



**NEW**

**TB0 A1XMU 214**

**6" COMPOSITE SAFETY TOE  
WATERPROOF**

Brown Full-Grain Leather  
7-11,12,13,14,15W



**TB0 A1Q5H 001**

**6" COMPOSITE SAFETY TOE  
WATERPROOF**

Black Full-Grain Leather  
7-11,12,13,14,15W





TIMBERLAND PRO® CARBONSHIELD™ TECHNOLOGY

# LIGHT IN WEIGHT. NOT IN PROTECTION.

**TIMBERLAND PRO® CARBONSHIELD™**

**TECHNOLOGY** adds strength and subtracts weight with the help of nanotechnology. It provides a better fit, lighter overall weight, and unmatched protection. It's the future of safety and it enhances the strength of our composite safety toe in the new Timberland PRO® Bosshog work boot.





# BOSSHOG



COMPOSITE  
SAFETY TOE



WATERPROOF  
MEMBRANE



BLOOD-BORNE  
PATHOGEN



PUNCTURE  
RESISTANT



18KV ELECTRICAL  
SHOCK



RUBBER  
OUTSOLE



METAL  
FREE



ANTIMICROBIAL  
ODOR CONTROL



ANTI-FATIGUE  
TECHNOLOGY..



CARBON  
SHIELD

TIMBERLAND PRO® RUBBER OUTSOLE WITH  
LIGHT-WEIGHT CUSHIONING EVA MIDSOLE



- Premium full-grain waterproof leather with a waterproof membrane
- Composite safety toe powered by CarbonShield™ Technology
- Non-metallic puncture plate
- Cement construction for flexibility
- Padded top collar for comfort
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Fiberglass shank for structural support
- Mark II oily wet #3 on American Olean tile at .56

- Slip resistant
- Abrasion resistant
- Oil-resistant
- Heat resistant up to 572F using EN/ISO 20344:2004 (300C)
- Non-marking



**NEW**

**TB0 A1WSB 214**

**6" COMPOSITE SAFETY TOE  
WATERPROOF**

Brown Full-Grain Leather  
w/ Red  
5-12,13,14,15M/W



**NEW**

**TB0 A1XJP 001**

**6" COMPOSITE SAFETY TOE  
WATERPROOF**

Black Full-Grain Leather  
w/ Grey  
5-12,13,14,15M/W



**NEW**

**TB0 A1XKI 214**

**6" COMPOSITE SAFETY TOE  
WATERPROOF**

Brown Distressed Full-Grain  
Leather w/ Orange  
5-12,13,14,15M/W





# CAPROCK



## DUAL-DENSITY PU OUTSOLE



- Alloy safety toe
- Premium waterproof leather
- Ever-Guard™ leather for increased abrasion resistance
- Goodyear Welt Cast-Bond™ construction for a durability
- Unlined for breathability
- Unique “fingergrip” pull-on feature for ease of entry (1152A)
- Three-rib steel shank for structural support
- Non-metallic puncture-resistant plate
- Anti-Fatigue Technology for shock absorption and energy return

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Features Ladder Lock™ Outsole Radius



**TB0 A11T9 214**

**8" ALLOY SAFETY TOE**

Brown Smooth Leather  
with Ever-Guard™ Leather  
5-12,13,14,15M/W/XW



**TB0 1152A 214**

**ALLOY SAFETY TOE**

Brown Smooth Leather  
with Ever-Guard™ Leather  
5-12,13,14,15M/W/XW

# RIGMASTER



- Steel safety toe
- Premium waterproof leather and abrasion-resistant Ever-Guard™ leather with waterproof membrane
- Goodyear Welt Cast-Bond™ construction for a durable mechanical and chemical bond
- Anti-Fatigue Technology for shock absorption and energy return
- Unique “fingergrip” pull-on feature for ease of entry
- Padded top collar for comfort
- Mesh lining with antimicrobial treatment for odor control
- Steel shank for structural support

## DUAL-DENSITY PU OUTSOLE



- Lightweight, yet rugged with exceptional cushioning
- Aggressive tread design, featuring triangular lock lugs that provide maximum traction
- Oil resistant
- Abrasion resistant
- Features Ladder Lock™ outsole radius



**TB0 95553 214**

### 8" STEEL SAFETY TOE WATERPROOF

Brown Full-Grain Leather  
with Ever-Guard™ Leather  
7-12,13,14,15M/W



# RESISTOR

TIMBERLAND PRO™ THERMAL PLASTIC URETHANE OUTSOLE



COMPOSITE  
SAFETY TOE



WATERPROOF  
SEAM-SEALED



18KV ELECTRICAL  
HAZARD



PUNCTURE  
RESISTANT



ALL-WEATHER  
TPU OUTSOLE



ANTIMICROBIAL  
ODOR CONTROL



ANTI-FATIGUE  
TECHNOLOGY™



- Seam-sealed waterproof leather
- Composite safety toe
- Padded top collar for comfort
- Cement construction for flexibility
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Tri-density outsole/midsole for underfoot comfort and durability
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control

- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A 7 Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- Abrasion resistant



AVAILABLE IN  
SMALL SIZES

**TB0 91661 214**

**6" COMPOSITE SAFETY TOE  
WATERPROOF**

Brown Oiled Nubuck Leather  
3.5-12,13,14,15M/W

# MORTAR PULL-ON



STEEL  
SAFETY TOE



18KV ELECTRICAL  
HAZARD



TPU OUTSOLE



PUNCTURE  
RESISTANT



MUTILATION  
FREE



ANTIMICROBIAL  
ODOR CONTROL

- Premium full-grain leather
- Steel safety toe
- Non-metallic puncture-resistant plate
- Antimicrobial treatment for odor control
- Heavy-duty fiberglass shank for torsional stability and ladder support

## ALL-WEATHER THERMOPLASTIC URETHANE OUTSOLE



- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A 7 Diesel ISO 1817 liquid F for 22 hours and ASTM IIR903 & fuel B for 46 hours
- Slip resistant
- Abrasion resistant



SBP

WRU

SRC

**TB0 A1B1L 214**

### STEEL SAFETY TOE

Brown Full-Grain Leather

US: 5-12,13,14,15 M/W

EU: 37-49

UK: 4-11,12,13,14



# MAGNUS



STEEL  
SAFETY TOE



18KV ELECTRICAL  
HAZARD



PU OUTSOLE



PUNCTURE  
RESISTANT



ANTIMICROBIAL  
ODOR CONTROL



ANTI-FATIGUE  
TECHNOLOGY.

- Premium full-grain leather
- Steel safety toe
- Goodyear Welt Cast-Bond™ construction for durability
- Fabric lining with antimicrobial treatment for odor control
- Steel shank for structural support
- Non-metallic puncture-resistant plate
- Anti-Fatigue Technology for shock absorption and energy return

## DUAL-DENSITY PU OUTSOLE



- Aggressive tread design with slip-resistant properties
- Oil resistant
- Abrasion resistant
- Lightweight, yet rugged with exceptional cushioning
- Features Ladder Lock® outsole radius



TB0 87520 214

**6" STEEL SAFETY TOE**

Brown Full-Grain Leather  
5-12,13,14,15W



# EAGLE



- Steel safety toe
- Water-resistant premium nubuck leather upper
- Padded top collar for comfort
- Cement construction for flexibility and reduced break-in time
- Steel puncture-resistant plate

## RUBBER OUTSOLE



- Low profile for high surface contact
- Slip resistant
- Oil resistant
- Abrasion resistant



S3

HRO

SRC

**TB0 A137N 236**

**STEEL SAFETY TOE**

Camel Nubuck Leather

US: 5-8,9,10,11,11.5,12,13,14,15M

EU: 37-49

UK: 4-7,8,9,10,10.5,11,12,13,14,15







# SAWHORSE



- Premium full-grain leather
- Composite safety toe
- Seam-sealed waterproof leather upper
- Non-metallic puncture-resistant plate
- Padded collar for comfortable ankle fit
- Non-metallic shank
- Mesh lining for added breathability and comfort
- Slip-resistant wide tread lug outsole

## TIMBERLAND PRO® PU OUTSOLE



- Slip resistant
- Non-marking
- Abrasion-resistant



**TB0 A1GQ4 214**

**COMPOSITE SAFETY TOE  
WATERPROOF**

Brown Full-Grain Leather  
5,6,7-12,13,14,15W





NEW TIMBERLAND PRO® MET GUARD FOOTWEAR

# ***FLEX AND PROTECT.*** ***WITH SKYDEX®*** ***TECHNOLOGY.***

**INTERNAL  
MET GUARD**  
WITH SMART HINGE™  
TECHNOLOGY FLEXIBLE  
SHELL AND **SKYDEX**®  
IMPACT PROTECTION

**EXTERNAL  
MET GUARD**  
WITH SMART HINGE™  
TECHNOLOGY AND  
**SKYDEX**® IMPACT  
PROTECTION



**SKYDEX**  
**MET•GUARD**

- High-impact shock absorption without the bulk
- Flexible design reduces foot fatigue
- Thin and lightweight protection
- Open airflow reduces heat buildup





# HELIX HD MET GUARD



- Distressed full-grain leather
- Composite safety toe power by CarbonShield™ Technology
- Cast metal hardware with dual purpose top hook
- Direct inject construction
- Molded Timberland PRO® rubber toe
- Fiberglass shank for structural support
- Internal metatarsal guard powered by SKYDEX® met guard impact protection
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Mesh lining with anti-microbial treatment for odor control

TIMBERLAND PRO® RUBBER OUTSOLE WITH  
LIGHT-WEIGHT CUSHIONING PU MIDSOLE



- Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Ladder-Lock™ Outsole Radius



**NEW**

**TB0 A1VXG 214**

**6" COMPOSITE SAFETY TOE  
INTERNAL MET GUARD**

Red Brown Full-Grain Leather  
7-12,13,14,15M/W



# MILLWORKS MET GUARD



TIMBERLAND PRO® RUBBER OUTSOLE WITH  
LIGHT-WEIGHT CUSHIONING PU MIDSOLE



- Premium full-grain leather
- Composite safety toe power by CarbonShield™ Technology
- Goodyear welt construction for a durable mechanical bond
- Protective thread includes DuPont™ Kevlar® Aramid fiber on upper and welt for durability and heat resistance
- Triple-ribbed steel shank
- External metatarsal guard powered by SKYDEX® Met Guard impact protection
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Unlined

- Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking



**TB0 A1VWT 214**  
**6" COMPOSITE SAFETY TOE**  
**EXTERNAL MET GUARD**  
 Brown Full-Grain Leather  
 7-12,13,14,15M/W



# EXTERNAL MET GUARD



- Steel safety toe
- Premium abrasion-resistant Ever-Guard™ leather for extreme durability
- Goodyear welt construction for a durable mechanical bond
- Leather padded top collar for comfort
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Cast metal top hooks for increased durability
- Steel shank for structural support
- Protective thread includes DuPont™ Kevlar® Aramid fiber on upper and welt for durability and heat resistance
- External, asymmetrical ABS metatarsal guard is hinged for comfortable protection

TIMBERLAND PRO® RUBBER OUTSOLE WITH  
INTERNAL POLYURETHANE COMFORT ZONES



- Slip resistant
- Heat resistant
- Oil resistant
- Abrasion resistant
- Internal polyurethane comfort zones



TB0 40000 001

## 6" STEEL SAFETY TOE EXTERNAL MET GUARD

Black Full-Grain Leather with  
Ever-Guard™ Leather  
5-12,13,14,15M/W



# MUDSLINGER



STEEL  
SAFETY TOE



18KV ELECTRICAL  
HAZARD



WATERPROOF  
MEMBRANE



RUBBER OUTSOLE



ANTIMICROBIAL  
ODOR CONTROL



- Steel safety toe
- Waterproof full-grain nubuck leather with waterproof membrane
- Abrasion-resistant synthetic toe and heel
- Cement construction for flexibility and reduced break-in time
- Lightweight molded EVA midsole for athletic performance
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Nylon and leather ghillie lacing system for lightweight durability and secure fit
- Nylon shank for structural support
- Open-cell polyurethane footbed with antimicrobial treatment for odor control

## TIMBERLAND PRO® RUBBER OUTSOLE




- Slip resistant
- Oil resistant
- Abrasion resistant



TB0 86515 214

**5" STEEL SAFETY TOE  
WATERPROOF**

Brown Nubuck Leather  
7-12,13,14,15M/W

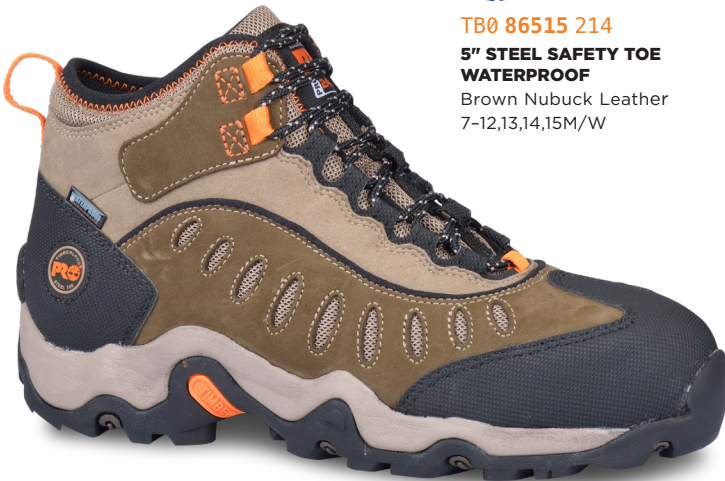

# RATCHET



STEEL  
SAFETY TOE



PUNCTURE  
RESISTANT



18KV ELECTRICAL  
SHOCK



RUBBER OUTSOLE



ANTIMICROBIAL  
ODOR CONTROL



- Leather upper for comfort and abrasion resistance
- Steel safety toe
- Molded Timberland PRO® rubber toe
- Cement construction for flexibility
- Metallic puncture-resistant plate
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control

## TIMBERLAND PRO® RUBBER OUTSOLE



- Oil resistant
- Abrasion resistant
- Non-marking
- Slip resistant



AVAILABLE IN  
SMALL SIZES

TB0 39077 210

**STEEL SAFETY TOE**

Chocolate Oiled

Nubuck Leather

3.5-12,13,14,15M/W



# ***BUILT TO GO THE DISTANCE***

**TIMBERLAND PRO® POWERTRAIN SPORT SAFETY SHOE**  
WITH ANTI-FATIGUE TECHNOLOGY



- Ripstop nylon for breathable comfort and durability
- Alloy safety toe for lightweight protection
- Proprietary Timberland PRO® polyurethane outsole with built-in Anti-Fatigue Technology to provide shock absorption, energy return, and rubber-like grip
- TPU toe overlay for increased abrasion resistance and durability
- Electrical Shock Protection (EH) from open circuits or Electro Static Dissipative Protection (ESD/SD+) from static build-up or discharge





# POWERTRAIN SPORT



ALLOY  
SAFETY TOE



18KV ELECTRICAL  
HAZARD



PU OUTSOLE



MUTILATION  
FREE



ANTIMICROBIAL  
ODOR CONTROL



ANTI-FATIGUE  
TECHNOLOGY

A176A

- Synthetic textile for breathable comfort and durability
- Alloy safety toe
- Cement construction for flexibility and reduced break-in time
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Anti-Fatigue Technology for shock absorption and energy return

## TIMBERLAND PRO® PU OUTSOLE



- BASF® super lightweight PU balances low density with flexibility, traction and comfort
- Molded inverted cone Anti-Fatigue Technology provides support, cushioning and energy return
- Slip resistant
- Oil resistant
- Abrasion resistant



TB0 A1GT9 065

**ALLOY SAFETY TOE SD+**

Grey Ripstop Nylon with Orange  
7-12,13,14,15M/W



TB0 A176A 001

**ALLOY SAFETY TOE**

Black Ripstop Nylon  
7-12,13,14,15M/W



TB0 A1GTK 001

**ALLOY SAFETY TOE SD+**

Blue Ripstop Nylon with Yellow  
7-12,13,14,15M/W





# POWERTRAIN




- Synthetic textile for breathable comfort and durability
- Alloy safety toe
- Cement construction for flexibility and reduced break-in time
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Anti-Fatigue Technology for shock absorption and energy return

## TIMBERLAND PRO® PU OUTSOLE



- BASF® super lightweight PU balances low density with flexibility, traction and comfort
- Molded inverted cone Anti-Fatigue Technology provides support, cushioning and energy return
- Slip resistant
- Abrasion resistant

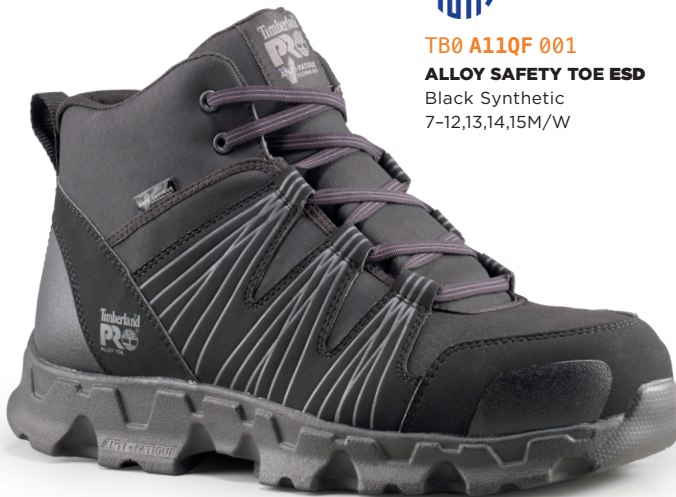

**TB0 A11QF 001**

**ALLOY SAFETY TOE ESD**

Black Synthetic  
7-12,13,14,15M/W

# WILDCARD



## VIBRAM® RUBBER OUTSOLE



- Composite safety toe
- Premium synthetic upper
- Thermoplastic shank
- Padded top collar for comfort
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Non-metallic puncture-resistant plate

- Slip resistant
- Oil resistant per SATRA TM63
- Heat Resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Abrasion resistant
- Non Marking



**TB0 A1GQQ 001**

**COMPOSITE SAFETY TOE**

Black Synthetic

4,5,6,6.5,7,8,9,10,11,12,13M



**TB0 A1GSW 001**

**COMPOSITE SAFETY TOE**

Black Synthetic

3.5-12,13,14,15M





# GLADSTONE



**ESD**  
ELECTRO STATIC  
DISSIPATIVE



- Premium full-grain leather
- Steel safety toe
- Cement construction for flexibility
- Fiberglass shank for structural support
- Mutilation-free upper
- Goodyear® SafeGrip™ slip-resistant rubber sole for enhanced traction
- Anti-Fatigue Technology for shock absorption and energy return
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control

GOODYEAR® RUBBER OUTSOLE WITH PU MIDSOLE



- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking



**TB0 86509 214**

**STEEL SAFETY TOE ESD**  
Brown Full-Grain Leather  
7-12,13,14,15M/W



**TB0 85590 214**

**STEEL SAFETY TOE ESD**  
Brown Full-Grain Leather  
7-12,13,14,15M/W



# BRANSTON



- Alloy safety toe
- Premium oiled nubuck leather for comfort and abrasion resistance
- Non-metallic fiberglass shank for structural support
- Padded top collar for comfort
- Cement construction for flexibility and reduced break-in time
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control
- Metallic puncture-resistant plate
- Anti-Fatigue Technology for shock absorption and energy return

## DUAL-DENSITY PU OUTSOLE



- Slip resistant
- Oil resistant
- Non-marking
- Abrasion



**TB0 A11WE 214**

**ALLOY SAFETY TOE OXFORD ESD**

Brown Oiled Nubuck Leather  
5-12,13,14,15W



**TB0 A11WP 001**

**ALLOY SAFETY TOE OXFORD ESD**

Black Oiled Nubuck Leather  
5-12,13,14,15W



**TB0 A11X1 214**

**ALLOY SAFETY TOE MOC TOE SLIP-ON ESD**

Brown Distressed Leather  
5-12,13,14,15W



**TB0 A11XC 001**

**ALLOY SAFETY TOE MOC TOE SLIP-ON ESD**

Black Oiled Nubuck Leather  
5-12,13,14,15W





# VALOR™ TACTICAL



- Cement construction for flexibility and reduced break-in time
- Mesh lining with antimicrobial treatment for odor control and comfortable feet
- Metal detector friendly hardware
- Polycarbonate hardware for lightweight, non-metallic durability
- Athletic-inspired Vibram® outsole specifically built for traction on variable terrain
- Anti-Fatigue Technology for shock absorption and energy return

## VIBRAM® RUBBER OUTSOLE



- Non-marking
- Slip resistant
- Oil resistant
- Abrasion resistant



AVAILABLE IN  
SMALL SIZES

**TB0 92634 001**

**5" TACTICAL SOFT TOE**

Black Smooth Raptex Microfiber  
with 800D Ballistic Poly  
3.5-12,13,14,15M/W



AVAILABLE IN  
SMALL SIZES

**TB0 90667 001**

**TACTICAL SOFT TOE  
OXFORD**

Black Smooth Leather with Mesh  
3.5-12,13,14,15M/W



# VALOR™ DUTY



- Premium black full-grain leather
- Cement construction for flexibility and reduced break-in time
- Polishable smooth forefoot with textile upper panels
- Lightweight molded EVA midsole for athletic performance
- Mesh lining with antimicrobial treatment for odor control
- Scotchgard™ protector by 3M for stain resistance
- Anti-Fatigue Technology for shock absorption and energy return
- Rounded driving moc heel
- Prone lugs for stability
- Wall climb toe grip

## TIMBERLAND PRO® RUBBER OUTSOLE



- Non-marking
- Slip resistant
- Oil resistant
- Abrasion resistant



AVAILABLE IN  
SMALL SIZES

**TB0 A1FY5 001**

**DUTY OXFORD  
SOFT TOE**

Black Smooth Leather  
3.5-12,13,14,15,16,17,18M/W  
7-12,13,14,15,16,17,18XW





# MADE FOR WOMEN WHO MAKE

Timberland PRO is a recognized leader in women's work footwear. Our comprehensive collection meets the proportional fit needs of a women's foot, while appealing to her sense of style. At the same time, it delivers superior durability, performance and protection on the job. Using the same meticulous attention to detail, quality materials and proven technology that go into our men's products, we've created a women's collection that is equal in every way.





# WOMEN'S HIGHTOWER



A1KIT  
A1KKS



A1KKP



A1KKP



A1KIT  
A1KKS



A1KIT  
A1KKS



A1KKP



A1KKP



A1KKP



A1KKP



A1KKP



A1KKP

ALL-WEATHER TPU OUTSOLE WITH PU MIDSOLE



- Built on a single-width, anatomical last for a more versatile, optimal fit
- Waterproof and non-waterproof styles
- Alloy safety toe and steel safety toe styles
- Steel puncture-resistant plate styles
- Cement construction for flexibility
- Anti-Fatigue Technology for shock absorption and energy return
- Fiberglass shank for structural support
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- Abrasion resistant
- Non-marking



## TB0 A1KIT 214 6" ALLOY SAFETY TOE WATERPROOF

Turkish Coffee  
Full-Grain Leather  
5.5-10,11,12



## TB0 A1KKS 214 6" ALLOY SAFETY TOE WATERPROOF

Full-Grain Leather  
5.5-10,11,12



S3 SRC

## TB0 A1KKP 214 6" STEEL SAFETY TOE

Full-Grain Leather  
US: 5.5-10,11,12  
EU: 36-44  
UK: 3-8,9,10M



# WOMEN'S RIGMASTER



- Alloy safety toe
- Premium waterproof leather with waterproof membrane
- Goodyear Welt Cast-Bond™ construction for a durable mechanical and chemical bond
- Padded top collar for comfort
- Mesh lining with antimicrobial treatment for odor control
- Cast metal top hooks for increased durability
- Fiberglass shank for structural support
- Anti-Fatigue Technology for shock absorption and energy return

## DUAL-DENSITY PU OUTSOLE



- Lightweight, yet rugged with exceptional cushioning
- Aggressive tread design featuring triangular lock lugs that provide maximum traction
- Oil resistant
- Abrasion resistant
- Features Ladder Lock™ outsole radius



**TB0 92632 214**

**6" ALLOY SAFETY TOE  
WATERPROOF**

Red Brown Full-Grain Leather  
5.5-10, 11W




**TB0 A11K5 214**

**8" ALLOY SAFETY TOE  
WATERPROOF INSULATED**

Red Brown Full-Grain Leather  
5.5-10, 11W



# WOMEN'S POWERTRAIN SPORT



- Premium ripstop nylon upper
- Built on a women's specific last for optimal fit and comfort
- Raptak microfiber for extreme durability and protection (A115Q)
- Alloy safety toe
- Non-metallic shank for structural support
- Proprietary outsole with built-in Anti-Fatigue Technology for shock absorption and energy return
- Protective TPU toe overlay
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control

## ANTI-FATIGUE TECHNOLOGY PU OUTSOLE



- BASF® super lightweight PU balances low density with flexibility, traction and comfort
- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking



**TB0 A1I5Q 001**

**ALLOY SAFETY TOE**

Black Raptak with Pink  
5.5-10, 11M/W



**TB0 A1B7F 001**

**ALLOY SAFETY TOE**

Black Ripstop Nylon  
5.5-10, 11M/W





# WOMEN'S POWERTRAIN



WOMEN'S  
ORIGINAL FIT



ALLOY  
SAFETY TOE



ELECTRO STATIC  
DISSIPATIVE



PU OUTSOLE



PUNCTURE  
RESISTANT  
A1H30



HEEL ENERGY  
ABSORPTION  
A1H30



ANTIMICROBIAL  
ODOR CONTROL



ANTI-FATIGUE  
TECHNOLOGY

- Premium synthetic upper and ripstop nylon
- Built on a women's specific last for optimal fit and comfort
- Alloy safety toe
- Steel puncture-resistant plate (A1H30)
- Cement construction for flexibility
- Fiberglass shank for structural support
- Proprietary outsole with built-in Anti-Fatigue Technology for shock absorption and energy return
- Breathable and moisture-wicking lining with antimicrobial treatment for odor control

## TIMBERLAND PRO® PU OUTSOLE



- BASF® super lightweight PU balances low density with flexibility, traction and comfort
- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking



**TB0 92669 001**

**ALLOY SAFETY TOE ESD**

Black/Pink Synthetic and Textile  
5.5-10, 11M/W



**SIP SRC**

**TB0 A1H30 001**

**STEEL SAFETY TOE ESD**

Black Synthetic with Ripstop Nylon  
US: 5.5-11M  
EU: 36-43  
UK: 3-9M



# SIZING CHART

## MEN

| US   | UK   | EU   | CM   |
|------|------|------|------|
| 3    | 2    | 34.5 | 21,5 |
| 3.5  | 2.5  | 35   | 22,0 |
| 4    | 3    | 36   | 22,5 |
| 4.5  | 3.5  | 36.5 | 23   |
| 5    | 4    | 37   | 23,5 |
| 5.5  | 4.5  | 37.5 | 24,0 |
| 6    | 5    | 38   | 24,0 |
| 6.5  | 5.5  | 38.5 | 25,0 |
| 7    | 6    | 39   | 25,0 |
| 7.5  | 6.5  | 40   | 26,0 |
| 8    | 7    | 41   | 26,0 |
| 8.5  | 7.5  | 41.5 | 26,5 |
| 9    | 8    | 42   | 27,0 |
| 9.5  | 8.5  | 42.5 | 27,5 |
| 10   | 9    | 43   | 28,0 |
| 10.5 | 9.5  | 43.5 | 28,5 |
| 11   | 10   | 44   | 29,0 |
| 11.5 | 10.5 | 45   | 29,5 |
| 12   | 11   | 46   | 30,0 |
| 12.5 | 11.5 | 46.5 | 30,5 |
| 13   | 12   | 47   | 31,0 |
| 13.5 | 12.5 | 47.5 | 31,5 |
| 14   | 13   | 48   | 32,0 |
| 14.5 | 13.5 | 48.5 | 32,5 |
| 15   | 14   | 49   | 33,0 |
| 15.5 | 14.5 | 49.5 | 33,5 |
| 16   | 15   | 50   | 34,0 |
| 16.5 | 15.5 | 50.5 | 34,5 |
| 17   | 16   | 51   | 35,0 |
| 17.5 | 16.5 | 51.5 | 35,5 |
| 18   | 17   | 52   | 36,0 |
| 18.5 | 17.5 | 52.5 | 36,5 |
| 19   | 18   | 53   | 37,0 |
| 20   | 19   | 54   | 38,0 |

US-United States

EU-Europe

CM-Japan/Mexico

UK-United Kingdom

## WOMEN

| US   | UK  | EU   | CM   |
|------|-----|------|------|
| 4.5  | 2   | 34.5 | 21,5 |
| 5    | 2.5 | 35   | 22,0 |
| 5.5  | 3   | 36   | 22,5 |
| 6    | 3.5 | 36.5 | 23,0 |
| 6.5  | 4   | 37   | 23,5 |
| 7    | 4.5 | 37.5 | 24,0 |
| 7.5  | 5   | 38   | 24,0 |
| 8    | 5.5 | 38.5 | 25,0 |
| 8.5  | 6   | 39   | 25,0 |
| 9    | 6.5 | 40   | 26,0 |
| 9.5  | 7   | 41   | 26,0 |
| 10   | 8   | 42   | 27,0 |
| 10.5 | 8.5 | 42.5 | 27,5 |
| 11   | 9   | 43   | 28,0 |
| 11.5 | 9.5 | 43.5 | 28,5 |
| 12   | 10  | 44   | 29,0 |



# INSOLES

## ANTI-FATIGUE TECHNOLOGY ESD FOOTBED



**TB0 A10RE 827**

**ANTI-FATIGUE TECHNOLOGY ESD FOOTBED**  
XS, S, M, L, XL, XXL

### FEATURES

- Durable: resists compression set over time
- Resilient: recovers for next foot strike
- Mono-sided inverted Anti-Fatigue Technology cones
- Contoured bio-mechanically engineered top surface helps maintain proper gait
- Dynamic arch adapts to different foot shapes for maximum comfort
- Moisture-wicking open-cell top cover



**Ortholite®**  
comfort foam insoles

## ANTI-FATIGUE TECHNOLOGY FOOTBED



**TB0 91621 827**

**ANTI-FATIGUE TECHNOLOGY FOOTBED**  
XS, S, M, L, XL, XXL

### FEATURES

- Anti-Fatigue Technology utilizes a unique inverted cone design for lightweight, resilient support, superior shock absorption and energy return
- OrthoLite® top layer provides premium comfort and moisture management
- Anatomically contoured footbed cradles the foot to provide maximum comfort and support
- The dynamic arch design adapts to all foot shapes for maximum support and comfort



**Ortholite®**  
comfort foam insoles

**agion®**  
nature's antimicrobial

## INSITE FOOTBED



**TB0 A1Q82 001**

**ANTI-FATIGUE TECHNOLOGY FOOTBED POWERED BY FCX TECHNOLOGY**  
XS, S, M, L, XL, XXL

### FEATURES

- Anti-Fatigue Technology provides support, absorbs shock and returns energy back to the foot
- Contoured FCX Technology™ arch support promotes injury prevention and fatigue reduction
- OrthoLite top layer provides cushioning, comfort and moisture management
- Mesh lining with Agion® antimicrobial treatment for odor control and comfortable feet



**FCX TECHNOLOGY**

**Ortholite®**  
comfort foam insoles

**agion®**  
nature's antimicrobial

## SIZING LABEL STANDARDS

| SIZE       | XS    | S     | M     | L     | XL    | XXL   |
|------------|-------|-------|-------|-------|-------|-------|
| US WOMEN'S | 5/6   | 7/8   | 9/10  | 11/12 |       |       |
| US MEN'S   |       | 6/7   | 8/9   | 10/11 | 12/13 | 14/15 |
| UK         | 2/4   | 5/6   | 7/8   | 9/10  | 11/12 | 13/14 |
| EU         | 35/37 | 38/39 | 40/42 | 43/45 | 46/47 | 48/49 |





FUSION COMPOSITE

FOOT X TECHNOLOGY



# TECHNOLOGY KEY



PU OUTSOLE

## POLYURETHANE OUTSOLE

Lightweight and rugged, providing cushioning plus slip, oil and abrasion resistance.



TPU OUTSOLE

## THERMOPLASTIC URETHANE OUTSOLE

Lighter weight and more abrasion resistant than polyurethane, providing exceptional cushioning, plus slip, oil and abrasion resistance.



RUBBER OUTSOLE

## TIMBERLAND PRO® RUBBER

Heat-resistant, durable rubber compound offers enhanced slip, oil and abrasion resistance.



HEAT RESISTANT OUTSOLE

## HEAT-RESISTANT OUTSOLE

Solid Timberland PRO® rubber compound outsole resists hot contact using EN ISO 20344:2004 8.7 testing standard at 572°F to 1000°F.



ALL-WEATHER TPU OUTSOLE

## ALL-WEATHER THERMOPLASTIC URETHANE COLD FORMULA

Specially-formulated thermoplastic urethane compound designed to maintain flexibility in variable weather conditions, providing enhanced traction on wet and frosted ice surfaces, plus slip, oil and abrasion resistance.



PUNCTURE RESISTANT

## METALLIC PUNCTURE-RESISTANT OUTSOLE

Flexible, steel plate minimizes the likelihood of puncture wounds. Meets US and Canadian safety standards including ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 PR puncture resistance and CAN/CSA-Z195-14 Grade 1 with protective soles.



PUNCTURE RESISTANT

## NON-METALLIC PUNCTURE-RESISTANT OUTSOLE

Flexible non-metallic plate minimizes the likelihood of puncture wounds. Meets US and Canadian safety standards including ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 PR puncture resistance and CAN/CSA-Z195-14 Grade 1 with protective soles.



INDEPENDENT SUSPENSION NETWORK™

## INDEPENDENT SUSPENSION NETWORK™ TECHNOLOGY

Multi-density outsole with comfort lugs that act independently of each other and adapt to varying worksite conditions, providing an additional layer of cushioning, comfort and stability.



WATERPROOF MEMBRANE

## WATERPROOF MEMBRANE

Delivers maximum waterproof protection and blood-borne pathogen resistance. Meets ASTM F1671-07 safety standard.



WATERPROOF MEMBRANE

## SEAM-SEALED WATERPROOF

Seam-sealed waterproof leather for durable waterproof protection. Special tanning repels moisture for waterproof protection.



WATERPROOF LEATHER

## WATERPROOF LEATHER

Special tanning repels moisture for waterproof protection.



EVER-GUARD™ LEATHER

## EVER-GUARD™ LEATHER

Highly abrasion-resistant leather that enhances durability in rugged jobsite conditions.



ANTIMICROBIAL ODOR CONTROL

## ANTIMICROBIAL ODOR CONTROL

Treatment to help prevent and control odors.



STEEL SAFETY TOE

## STEEL SAFETY TOE

Metallic, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 I/75 and C/75 impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



COMPOSITE SAFETY TOE

## COMPOSITE SAFETY TOE

Lightweight, non-metallic, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 I/75 and C/75 impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



ALLOY SAFETY TOE

## ALLOY SAFETY TOE

Lightweight, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 I/75 and C/75 impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



ALLOY XL SAFETY TOE

## ALLOY XL SAFETY TOE

Roomier, lightweight, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 I/75 and C/75 impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



METATARSAL GUARD

## OPEN CELL MET GUARD

Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 Class Mt75 and CAN/CSA-Z195-15 metatarsal impact resistance.



18KV ELECTRICAL HAZARD

## ELECTRICAL HAZARD

Provides secondary underfoot protection against live electrical circuits, electrically energized conductors, parts or apparatus. Meets ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 standards.



ELECTRO STATIC DISSIPATIVE

## ELECTRO STATIC-DISSIPATIVE

Protects against hazards related to excessively low footwear resistance. Meets SD static-dissipative ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 safety standards.



METAL FREE

## METAL-FREE

Built with materials that should not activate most security systems or scratch surfaces.



METAL-DETECTOR FRIENDLY

## METAL-DETECTOR FRIENDLY

All materials and components should not activate most security systems.



BLOOD-BORNE PATHOGEN

## BLOOD-BORNE PATHOGEN

Breathable membrane helps protect from diseases caused by blood-borne pathogens.



MUTILATION FREE

## MUTILATION FREE UPPER

Nylon, plastic or hidden eyelets reduce the chances of marking or scratching surfaces.



WOMEN'S ORIGINAL FIT

## WOMEN'S ORIGINAL FIT

Made specifically to fit women's feet comfortably.



MADE FOR WOMEN

## MADE FOR WOMEN

Designed specifically for women, Timberland PRO® women's footwear is built with 3 distinctive points of comfort, including a more anatomical last, asymmetrical toe shape, and a low profile, resulting in a more feminine aesthetic.

## TECHNOLOGY KEY



### CSA BLUE PATCH/SD+

Meets CAN/CSA-Z195-14 safety standards for toe protection and SD+ when tested in accordance with ASTM F2412. Each test specimen shall fall within a range of 106 Ohms to 3.5 x 107 Ohms.



### CSA SD+

Meets CSA standards for SD+ when tested in accordance with ASTM F2412. Each test specimen shall fall within a range of 106 Ohms to 3.5 x 107 Ohms.



### CANADIAN SAFETY ASSOCIATION

Meets CAN/CSA-Z195-14 safety standards to provide toe protection, puncture resistance and resistance to electric shock in the sole.



### CSA METATARSAL-PROTECTIVE

Meets CSA Standards for metatarsal-protective footwear impact resistance.



### CARBON SHIELD TECHNOLOGY

Engineered with nanotechnology, adds strength and unmatched protection, provides a better fit and reduces weight.



### STABLE STRIDE TECHNOLOGY

Designed to provide lateral stability on slanted and uneven surfaces to help reduce ankle rolling, slippage and injury.



### SMARTHINGE™ TECHNOLOGY

Designed to provide comfort and flexibility to met guard footwear.



### TIMBERLAND PRO® RAPTEK

Raptek's non-solvent microfiber upper—with excellent wicking and fast drying properties—keeps feet comfortable and dry in wet conditions. Raptek has superior feel and improved cracking compared to natural leather.



### VIBRAM®

Outsoles built to withstand the harshest working environments.



### VIBRAM® FIRE & ICE

Vibram® Fire&ICE™ compound maintains flexibility in freezing temperatures.



### SKYDEX® MET-GUARD TECHNOLOGY

Engineered to provide lightweight impact protection to met guard footwear.

## TECHNOLOGY KEY

### EN ISO

**SB**

### SB

Class I safety footwear constructed with metallic or non-metallic protective safety toe caps designed to give the wearer protection against impact and compression, as defined by EN ISO 20345 Tables 1, 2, and 3.

**S1**

### S1

Safety footwear constructed with all Safety Basic (SB) protective features in addition to a closed seat region, Antistatic (A), Energy Absorption of the Seat Region (E), and Resistance to Fuel Oil (FO) protective features, as defined in EN ISO 20345 Tables 1, 2, 3, and 18.

**S2**

### S2

Safety footwear constructed with all S1 protective features in addition to water penetration and water absorption (WRU) protective features, as defined in EN ISO 20345 Tables 1, 2, 3, and 18.

**S3**

### S3

Safety footwear constructed with all S2 protective features with the addition of metallic and/or non-metallic Penetration Resistance (P) and Cleated Outsole protective features, as defined in EN ISO 20345 Tables 1, 2, 3, and 18.

**P**

### P

Safety footwear constructed with a component placed in the sole to provide protection against penetration, as defined in EN ISO 20345 6.2.1.

**E**

### E

Safety footwear constructed to allow for energy absorption of the seat region of minimum 20 J, as defined in EN ISO 20345 6.2.4.

**HRO**

### HRO

Safety footwear constructed with an outsole that shall not melt and shall not develop any cracks, as defined in EN ISO 20345 6.4.1.

**WRU**

### WRU

Footwear constructed with highly water-resistant upper materials, as defined in EN ISO 20345 6.3.

**WR**

### WR

Footwear constructed to provide water penetration protection, as defined in EN ISO 20345 6.2.5.

**SRA**

### SRA

Safety footwear constructed with slip-resistant properties tested on ceramic tile floor with sodium lauryl sulfate, in accordance with EN ISO 20345 5.3.5.2.

**SRB**

### SRB

Safety footwear constructed with slip-resistant properties tested on steel floor with glycerol, in accordance to EN ISO 20345 5.3.5.3.

**SRC**

### SRC

Safety footwear constructed with slip-resistant properties tested on ceramic floor with sodium lauryl sulfate and on steel floor with glycerol, in accordance to EN ISO 20345 5.3.5.4.



## FACTORY DIRECT CALENDAR

| ORDER DEADLINE  | EX-FACTORY DATES |          |          |                    |                |
|-----------------|------------------|----------|----------|--------------------|----------------|
|                 | BANGLADESH       | CHINA    | VIETNAM  | DOMINICAN REPUBLIC | IN SOLES CHINA |
| <b>7/23/18</b>  | 12/14/18         | 11/23/18 | 11/23/18 | 12/14/18           | 11/2/18        |
| <b>8/20/18</b>  | 1/18/19          | 12/28/18 | 12/28/18 | 1/18/19            | 12/7/18        |
| <b>9/24/18</b>  | 2/15/19          | 1/25/19  | 1/25/19  | 2/15/19            | 1/4/19         |
| <b>10/22/18</b> | 3/15/19          | 2/22/19  | 2/22/19  | 3/15/19            | 2/1/19         |
| <b>11/19/18</b> | 4/19/19          | 3/29/19  | 4/5/19   | 5/17/19            | 3/8/19         |
| <b>12/24/18</b> | 5/17/19          | 4/26/19  | 5/3/19   | 5/17/19            | 4/5/19         |
| <b>1/21/19</b>  | 6/14/19          | 5/24/19  | 5/31/19  | 6/14/19            | 5/3/19         |
| <b>2/18/19</b>  | 7/19/19          | 6/28/19  | 7/5/19   | 7/19/19            | 6/7/19         |
| <b>3/25/19</b>  | 8/16/19          | 7/26/19  | 8/2/19   | 8/16/19            | 7/5/19         |
| <b>4/22/19</b>  | 9/13/19          | 8/23/19  | 8/30/19  | 9/13/19            | 8/2/19         |
| <b>5/20/19</b>  | 10/18/19         | 9/27/19  | 10/4/19  | 10/18/19           | 9/6/19         |
| <b>6/24/19</b>  | 11/15/19         | 10/25/19 | 11/1/19  | 11/15/19           | 10/4/19        |
| <b>7/22/19</b>  | 12/13/19         | 11/22/19 | 11/29/19 | 12/13/19           | 11/1/19        |
| <b>8/19/19</b>  | 1/17/20          | 12/27/19 | 1/3/20   | 1/17/20            | 12/6/19        |
| <b>9/23/19</b>  | 2/14/20          | 1/24/20  | 1/31/20  | 2/14/20            | 1/3/20         |
| <b>10/21/19</b> | 3/13/20          | 2/21/20  | 2/28/20  | 3/13/20            | 1/31/20        |

## PAGE INDEX

|               |   |    |               |  |    |
|---------------|---|----|---------------|--|----|
| TB0 A1X6T 001 | Helix HD 6" Composite Safety Toe Waterproof           | 9  | TB0 A11QF 001 | Powertrain Alloy Safety Toe ESD                            | 32 |
| TB0 A1XFM 214 | Helix HD 6" Composite Safety Toe Waterproof           | 9  | TB0 A1GQQ 001 | Wildcard Composite Safety Toe                              | 33 |
| TB0 A1YZM 214 | Helix HD 8" Composite Safety Toe Waterproof           | 9  | TB0 A1GSW 001 | Wildcard Composite Safety Toe                              | 33 |
| TB0 A1XCH 214 | Boondock 6" Composite Safety Toe Unlined              | 11 | TB0 86509 214 | Gladstone Steel Safety Toe ESD                             | 34 |
| TB0 A1V3W 270 | Boondock 8" Composite Safety Toe Unlined              | 11 | TB0 85590 214 | Gladstone Steel Safety Toe ESD                             | 34 |
| TB0 89646 214 | Boondock 8" Composite Safety Toe Waterproof Insulated | 11 | TB0 A11WE 214 | Branston Alloy Safety Toe Oxford ESD                       | 35 |
| TB0 A1XMU 214 | Hypercharge 6" Composite Safety Toe Waterproof        | 13 | TB0 A11WP 001 | Branston Alloy Safety Toe Oxford ESD                       | 35 |
| TB0 A1Q5H 001 | Hypercharge 6" Composite Safety Toe Waterproof        | 13 | TB0 A11X1 214 | Branston Alloy Safety Toe Moc Toe Slip-On ESD              | 35 |
| TB0 A1WSB 214 | Bosshog 6" Composite Safety Toe Waterproof            | 15 | TB0 A11XC 001 | Branston Alloy Safety Toe Moc Toe Slip-On ESD              | 35 |
| TB0 A1XJP 001 | Bosshog 6" Composite Safety Toe Waterproof            | 15 | TB0 92634 001 | Valor™ Tactical 5" Soft Toe                                | 36 |
| TB0 A1XKI 214 | Bosshog 6" Composite Safety Toe Waterproof            | 15 | TB0 90667 001 | Valor™ Tactical Soft Toe Oxford                            | 36 |
| TB0 A11T9 214 | Caprock 8" Alloy Safety Toe                           | 16 | TB0 A1FY5 001 | Valor™ Duty Soft Toe Oxford                                | 37 |
| TB0 1152A 214 | Caprock Alloy Safety Toe                              | 16 | TB0 A1KIT 214 | Women's Hightower 6" Alloy Safety Toe Waterproof           | 38 |
| TB0 95553 214 | Rigmaster 8" Steel Safety Toe Waterproof              | 17 | TB0 A1KKS 214 | Women's Hightower 6" Alloy Safety Toe Waterproof           | 38 |
| TB0 91661 214 | Resistor 6" Composite Safety Toe Waterproof           | 18 | TB0 A1KKP 214 | Women's Hightower 6" Steel Safety Toe                      | 38 |
| TB0 A1B1L 214 | Mortar Pull-On Steel Safety Toe                       | 19 | TB0 92632 214 | Women's Rigmaster 6" Alloy Safety Toe Waterproof           | 40 |
| TB0 87520 214 | Magnus 6" Steel Safety Toe                            | 20 | TB0 92632 214 | Women's Rigmaster 8" Alloy Safety Toe Waterproof Insulated | 40 |
| TB0 A137N 236 | Eagle 6" Steel Safety Toe                             | 21 | TB0 A1I5Q 001 | Women's Powertrain Sport Alloy Safety Toe                  | 41 |
| TB0 A1GQ4 214 | Sawhorse 6" Composite Safety Toe Waterproof           | 23 | TB0 A1B7F 001 | Women's Powertrain Sport Alloy Safety Toe                  | 41 |
| TB0 A1VXG 214 | Helix HD 6" Composite Safety Toe Internal Met Guard   | 25 | TB0 92669 001 | Women's Powertrain Alloy Safety Toe ESD                    | 42 |
| TB0 A1VWT 214 | Millworks 6" Composite Safety Toe External Met Guard  | 26 | TB0 A1H30 001 | Women's Powertrain Steel Safety Toe ESD                    | 42 |
| TB0 40000 001 | External Met Guard 6" Steel Safety Toe                | 27 | TB0 A10RE 827 | Anti-Fatigue Technology ESD Footbed                        | 44 |
| TB0 86515 214 | Mudslinger 5" Steel Safety Toe Waterproof             | 28 | TB0 91621 827 | Anti-Fatigue Technology Footbed                            | 44 |
| TB0 39077 210 | Rachet Steel Safety Toe                               | 29 | TB0 A1Q82 001 | Anti-Fatigue Technology Footbed w/ FCX Technology          | 44 |
| TB0 A1GT9 065 | Powertrain Sport Alloy Safety Toe SD+                 | 31 |               |  |    |
| TB0 A176A 001 | Powertrain Sport Alloy Safety Toe                     | 31 |               |  |    |
| TB0 A1GTK 001 | Powertrain Sport Alloy Safety Toe SD+                 | 31 |               |  |    |










**TIMBERLAND PRO**  
200 Domain Drive  
Stratham, NH 03885

**CUSTOMER SERVICE:**  
1-855-253-3261

Timberland, , Timberland PRO, the PRO logo, ISN, the ISN logo, Independent Suspension Network, PowerFit, Titan, 24/7 Comfort Suspension, PRO 24/7 Comfort Suspension, the PRO 24/7 Comfort Suspension logo, Valor, Cast-Bond, Ever-Guard, The Anti-Fatigue Technology logo, Ladder Lock, SafeGrip, Raptex, Smart Comfort, WickWork, CarbonShield, Stable Stride, StepVent, SmartHinge, Exospine, RainRepel, and Sensorflex are trademarks of TBL Licensing LLC. Kevlar is a trademark of E.I. du Pont de Nemours and Company. Cordura and Thermolite are trademarks of Invista North America S.A.R.L. Outlast is a trademark of Outlast Technologies, Inc. 3m, Scotchlite, and Scotchgard are trademarks of 3M. Vibram, Fire&Ice, Arctic Grip and the yellow octagonal label are trademarks of Vibram S.p.A. OrthoLite is a trademark of O2 Partners LLC. BASF is a trademark of BASF SE. Repreve is a trademark of Unifi, Inc. FCX Technology is a trademark of FCX Global, Inc. Agion is a trademark of Agion Technologies, LLC. CoolTouch is a trademark of Shinkong Synthetic Fibers Corporation. © 2018 TBL Licensing LLC. All rights reserved. PRO114